

# Electronic Non-Prog. Thermostat CLEAR TOUCH Series



K322E



K312RELAY

- Simple Up & Down temperature selection
- Electronic sensing for accurate temperature control ( $\pm 1^\circ\text{F}$ ,  $\pm 0.5^\circ\text{C}$ )
- Modern design with clear Acrylic panel
- Touch sensitive buttons
- Large LCD display with blue backlight
- Temperature lock feature: set a min & Max temp limit
- Save up to 15% on your heating costs
- 3 minute cycle rate reduces temperature swings
- Complies with all anticipated/electronic codes
- System On/Standby switch
- Dual Voltage – 120V or 208/240V



## The ClearTouch™ Non-Programmable Electronic Thermostat

King's ClearTouch K322E combines user-friendly touch sensitive buttons with a sleek modern design, offering simple control of a room's temperature. ClearTouch's electronic sensing, provides highly accurate temperature control ( $\pm 1^\circ\text{F}$ ,  $\pm 0.5^\circ\text{C}$ ) for line voltage electric heaters, saving up to 15% on your heating costs.

### Ordering Information

MODEL	UPC	DESCRIPTION
K322E	40360	Thermostat Non-Programmable 120/208/240V 15A
K312RELAY	10400	Thermostat Slave Relay DP 120/208/240V 15A

### Engineering Specifications

**Temperature Range:** 41° - 95°F (5° - 35°C) **Accuracy:** +1° F  
**Max Power:** 1800W @ 120VAC (15A)  
**Max Power:** 3120W @ 208VAC (15A)  
**Max Power:** 3600W @ 240VAC (15A)  
**Sensing Element:** Electronic




### Want To Control Multiple Heaters?

K322E thermostats are compatible with K312RELAY (Shown Below) to extend the heating zone beyond 15A & control from one master location.

ClearTouch™



K312RELAY

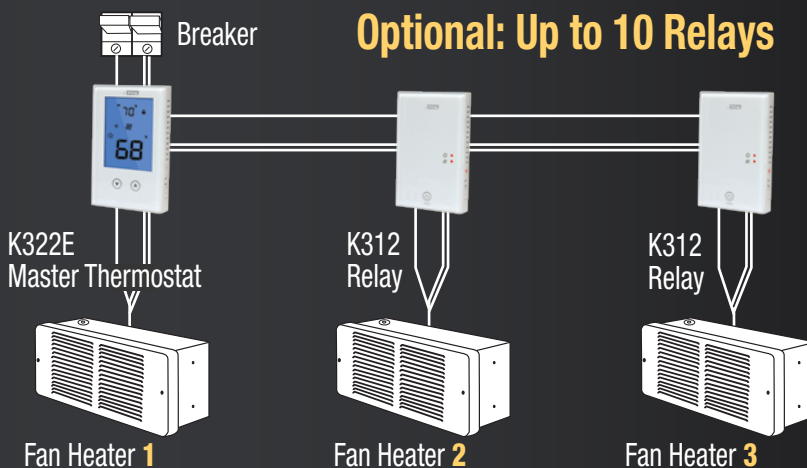

Optional: Up to 10 Relays

- Add up to 10 Relays to extend the heating zone
- Settings controlled by master thermostat
- Receives signal & activates heat when required
- ON/STANBY switch to disable heating independently