


# Low-Voltage Thermostats 1F56W/1F57/1E30

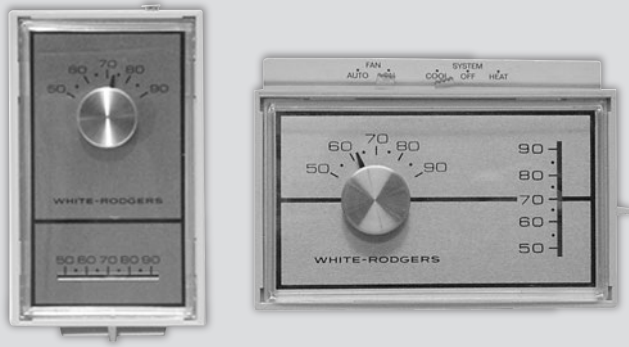


- Heating and cooling anticipators provide narrow differential control of room temperature
- Snap-on cover with clear faceplate
- Removable faceplate for easy cleaning
- 1 year warranty
- Beige case with gold and black dial
- Accessories available: adapter plates to allow mounting to vertical or horizontal junction boxes and to cover wall blemishes

## The 1F56W/1F57/1E30 Series Low Voltage Thermostats

### Ordering Information

MODEL	UPC	VOLTS	TYPE	TEMP. RANGE
1E30-910	19000	24	Mercury Free, Vertical Mount - beige	50°F to 90°F
1F56W-444	19010	24	Mercury Free, Heat / Cool / Fan, Horizontal - white	50°F to 90°F
1F57-312	19015	24	Two Stage Heat Plus Fan Only	50°F to 90°F

### Dimensional Data

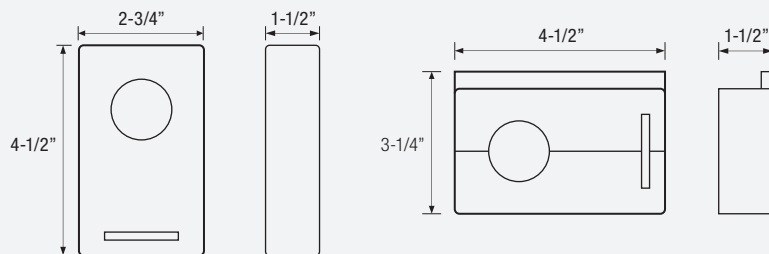

### Technical Specifications

- Three wire installation.
  - Snap action switch.
  - Flexible wire leads.
  - 50° to 90°F (10°C - 32°C).
  - Anticipated (resistor style).
  - Large bi-metal sensor.
  - Meets most energy codes.
  - For use on all types of electric heater relays; fan-forced, baseboard, radiant with 24 Volt control circuits.
- Temperature Range:** 50°F to 90°F (10°C to 32°C)  
**Temperature Default:** 55°F or 68°F (13°C or 20°C)  
**Display:** 5° increments  
**Rate:** 2 cycles per hour  
**Accuracy:** ±3°F  
**Power Source:** 24 VAC