

# NPR

New Product Release



ClearTouch™

Available February 2018

**K322E**

Non-Programmable  
Electronic Solution

Providing Highly Accurate  
Temperature Control  
Of Line Voltage  
Electric Heaters.

Can Be Used with K312RELAY to Extend  
the Heating Zone & Control From  
One Master Location. Ideal for Heating  
Applications Exceeding 15A. The Master  
Thermostat Controls an Extended Heating  
Zone Driven by Relay Units  
(Purchased Separately).



# K322E

## Non-Programmable Electronic Solution

Non-Programmable: Simple Up & Down Temperature Selection

Modern Design with Clear Acrylic Panel

Touch Sensitive Buttons

Large LCD Display with Blue Backlight

Temperature Lock Feature: Set a Min & Max Temp Limit

Electronic Temperature Sensing

3 Minute Cycle Rate Reduces Temperature Swings

Complies with All Codes Requiring Anticipated/Electronic Thermostats

System On/Standby Switch

Dual Voltage – 120V or 208/240V

Double Pole: Max 15 Amps  
1800W @120V  
3120W @208V  
3600W @240V

### WARRANTY

1-Year Limited Warranty



- Modern Design – with Clear Acrylic Panel
- Large LCD Display with Blue Backlight
- Temperature Lock Feature: Set a Min & Max Temp Limit
- Vacation Mode
- Dual Voltage 120/208/240V
- Touch Sensitive Buttons
- Can Be Used with K312RELAY (Purchased Separately) to Control Up to 10 Relays From One Master Location



- Modern Design – with Clear Acrylic Panel
- Add up to 10 Relays to extend the heating zone with low voltage wiring
- Receives signal sent by master thermostat & activates heat when required
- Settings/programming is controlled by master thermostat
- ON/STANBY switch enables unit's heating area to be shut down independently of others
- Dual Voltage 120/208/240V
- Touch Sensitive Buttons

### Ordering Information

MODEL	UPC	DESCRIPTION	WT. (lbs.)	LIST PRICE
K322E	10399	Thermostat Non-Programmable 120/208/240V 15A	0.6	120.00
K312RELAY	10400	Thermostat Slave Relay DP 120/208/240V 15A	0.6	110.53

# NPR




Smart Heating Solutions

## New Product Release

### Can be used with K312RELAY to extend the heating zone & control from one master location.

Ideal for heating applications exceeding 15A. The master thermostat controls an extended heating zone driven by relay units (Purchased Separately).

### Optional: Up to 10 Relays

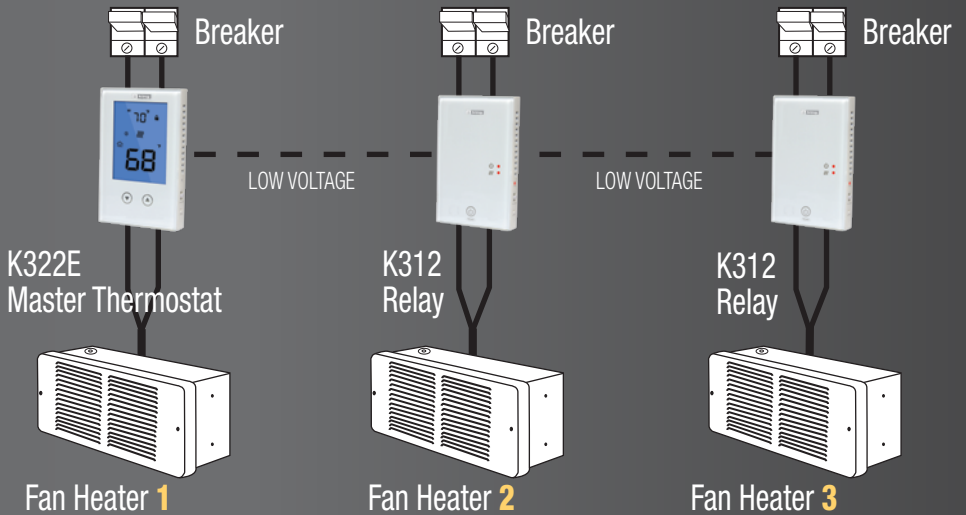

### Advanced Features for Ease of Use