




KING ELECTRICAL MFG. CO.
SEATTLE, WA 98108

PT-1

IN-BUILT THERMOSTAT KIT FOR
KING MODEL **PAW** ELECTRIC
WALL HEATER - SINGLE POLE



MAIN BREAKER

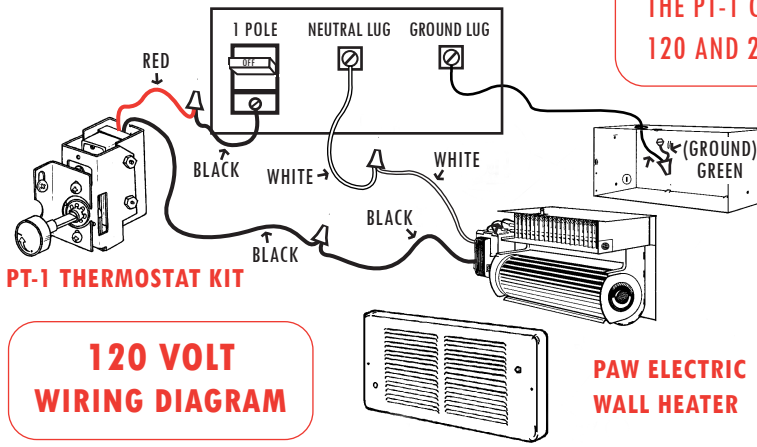


PT-1 THERMOSTAT KIT

120 VOLT WIRING DIAGRAM

PAW ELECTRIC
WALL HEATER

MAIN BREAKER

THE PT-1 CAN BE USED WITH
120 AND 240 VOLT HEATERS

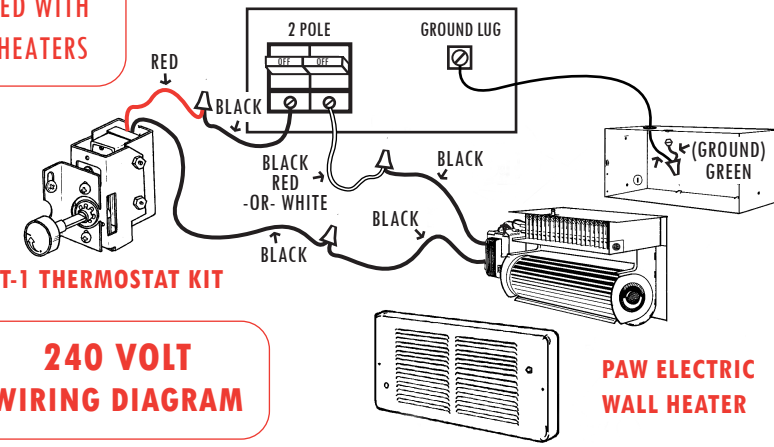

PT-1 THERMOSTAT KIT

240 VOLT WIRING DIAGRAM

PAW ELECTRIC
WALL HEATER


DANGER:

RISK OF SEVERE ELECTRICAL
SHOCK. DISCONNECT POWER
FROM MAIN BREAKER PANEL
FIRST BEFORE INSTALLATION.

FOR USE WITH:
120, 208, 240 VAC / 22 AMP
277 VAC / 18 AMP

TEMPERATURE RANGE: 40° - 90°F

PAW SERIES HEATER WITH PT-1 INSTALLATION

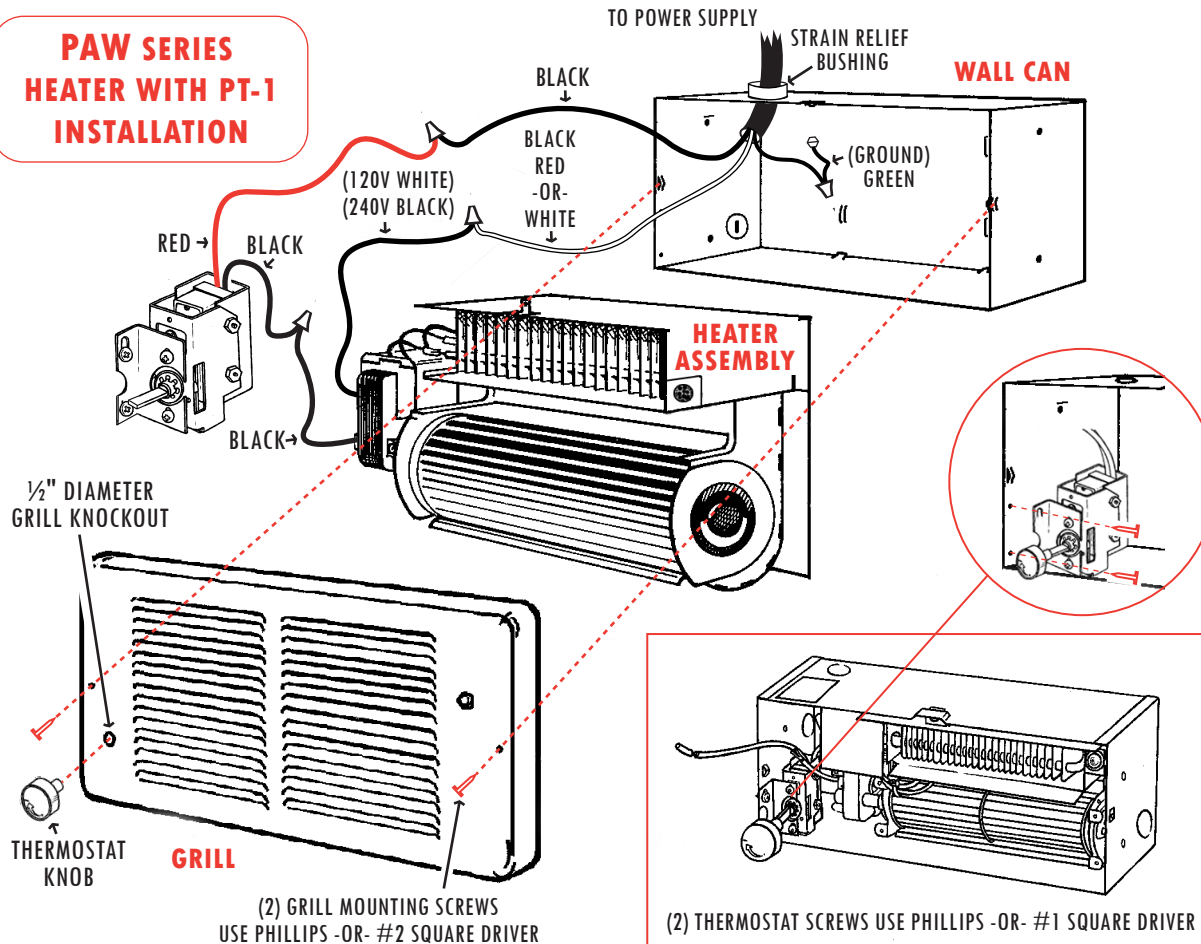

1/2" DIAMETER
GRILL KNOCKOUT

THERMOSTAT
KNOB

GRILL


(2) GRILL MOUNTING SCREWS
USE PHILLIPS -OR- #2 SQUARE DRIVER

(2) THERMOSTAT SCREWS USE PHILLIPS -OR- #1 SQUARE DRIVER

INSTRUCTIONS

1. MOUNT THERMOSTAT WITH 2 SCREWS PROVIDED.
2. COMPLETE WIRING AS SHOWN FOR THE PT-1.
3. INSTALL HEATER ASSEMBLY INTO WALL CAN.
4. REMOVE 1/2" GRILL KNOCKOUT FOR THERMOSTAT SHAFT.
5. MOUNT GRILL WITH 2 SCREWS.
6. PLACE PLASTIC KNOB ON THERMOSTAT SHAFT BY PUSHING KNOB THROUGH GRILL OPENING.

TOOLS:



PHILLIPS #1 SQUARE #2 SQUARE



ACCESSORY FOR THE
PAW SERIES HEATER

PT-1

