

# High Velocity Outdoor Rated Air Circulator PFO Series



Optional Misting Kit (Shown)



Model Code:

PFO -24  
A B

A: Series  
B: Fan Diameter  
-24 = 24"  
-30 = 30"



- 24" & 30" Commercial High Velocity Oscillating Air Circulator
- Outdoor Rated with Pedestal Base
- Optional Misting Kit Available
- Optional Fan-Speed-Controller
- 3-Speed Pull Chain Switch
- Totally Enclosed, Outdoor Rated Motor
- 3 Aerodynamically Balanced Blades
- Heavy Duty Steel Fan Guards
- Meets OSHA 1910.212(A)(5) Requirements
- 9 Ft, 120V Grounded Cord & GFCI Plug
- Scratch Resistant, Powder-Coated Finish
- Adjustable Height from 57" to 75"
- UL Certified for USA & Canada
- 1-Year Limited Warranty

## The King High Velocity Commercial Air Circulator

**King Commercial High Velocity Outdoor Rated Oscillating Air Circulators** are a powerful commercial-grade solution for cooling workshops, warehouses, factories, gyms and more. This oscillating fan motion distributes airflow in a 80 degree sweeping motion or from a fixed position. The waterproof, totally enclosed motor is outdoor rated for wet locations and offers 3-speeds. Featuring 3 aerodynamically balanced aluminum blades for even, steady airflow and to provide maximum air and motor efficiency. The scratch resistant King green finish looks sharp and is easy to clean. Height adjustable from 57" to 75" to direct the air flow where you need it most.

### Ordering Information

| MODEL NUMBER | UPC #093319 | DESCRIPTION   | CFM            | WT. (lbs.) |
|--------------|-------------|---|----------------|------------|
| PFO-24       | 33151       | 24" Outdoor Rated Oscillating Circulator With Pedestal Base | 7500/6200/4900 | 67.2       |
| PFO-30       | 33152       | 30" Outdoor Rated Oscillating Circulator With Pedestal Base | 8200/6800/5300 | 73.3       |

### Accessories

| MODEL                | UPC   | DESCRIPTION   | SHIP WEIGHT lbs |
|----------------------|-------|---|-----------------|
| PFO-MISTKIT          | 33153 | Add-On Accessory For Optional Misting Feature           | 0.5             |
| FO-COVER-24          | 55376 | 24" Water Resistant Fan Cover                           | 0.25            |
| FO-COVER-30          | 55377 | 30" Water Resistant Fan Cover                           | 0.25            |
| FAN-SPEED-CONTROLLER | 55378 | Fan Motor Variable Speed Control Plug-In, 120V 2.5A Max | 0.5             |



FAN-SPEED-CONTROLLER



FO-COVERS  
(Available in 24" & 30")

# High Velocity Outdoor Rated Air Circulator PFO Series

## PFO Series




Outdoor Rated  
for Wet Locations

9 Ft Grounded Three  
Wire Conductor Cord  
& GFCI Plug, 120V -  
For Easy Portability  
& Safety

Optional Misting  
Kit Available: Adds  
a Fine Mist of Cool  
Comfort to Hot  
Environments

Scratch Resistant,  
Powder-Coated  
Finish for Durability

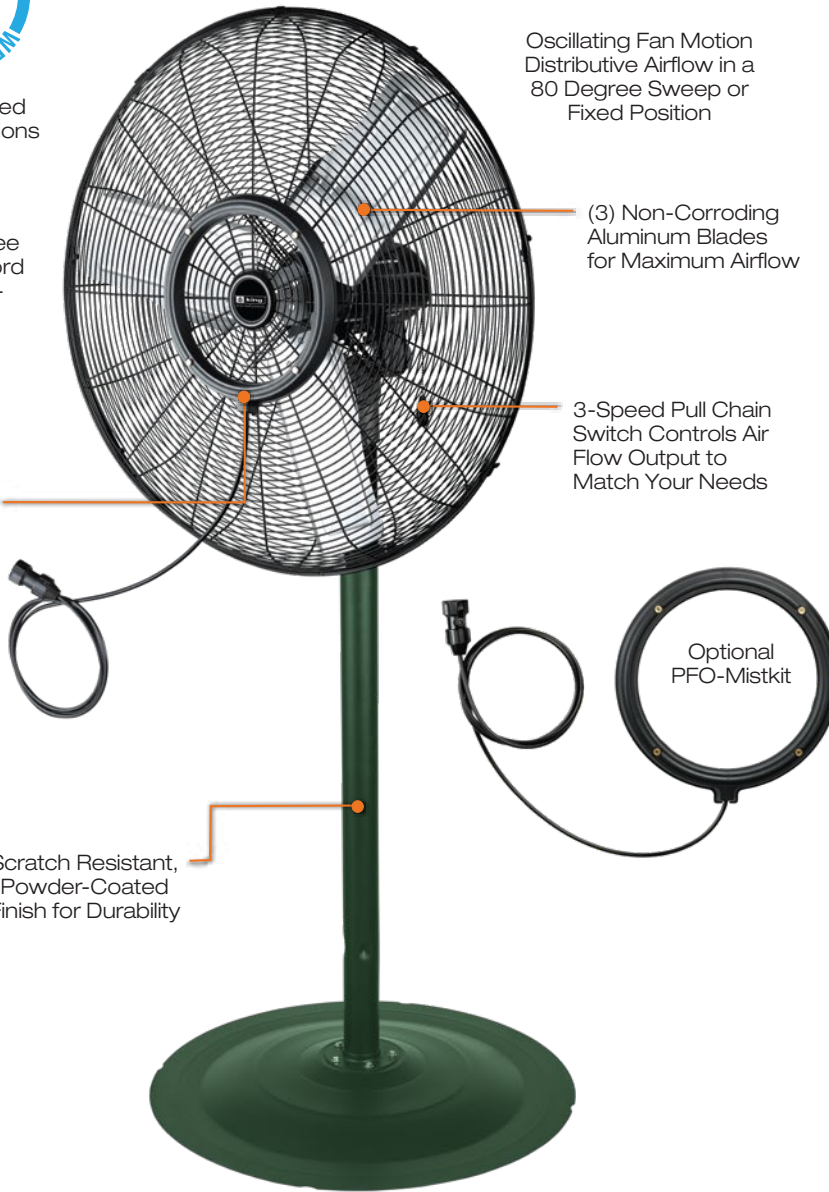

Oscillating Fan Motion  
Distributive Airflow in a  
80 Degree Sweep or  
Fixed Position

(3) Non-Corroding  
Aluminum Blades  
for Maximum Airflow

3-Speed Pull Chain  
Switch Controls Air  
Flow Output to  
Match Your Needs

Optional  
PFO-Mistkit

Water Resistant  
Fan Cover  
(Available in 24" & 30")



# High Velocity Outdoor Rated Air Circulator WFO Series



Optional Misting Kit (Shown)



**Model Code:**

WFO -24  
A B

A: Series  
B: Fan Diameter  
-24 = 24"  
-30 = 30"



- 24" & 30" Commercial High Velocity Oscillating Air Circulator
- Outdoor Rated with Wall Mount
- Wall mounted to direct airflow
- 80 degree oscillating motion
- Optional Misting Kit Available
- Optional Fan-Speed-Controller
- 3-Speed Pull Chain Switch
- Totally Enclosed, Outdoor Rated Motor
- 3 Aerodynamically Balanced Blades
- Heavy Duty Steel Fan Guards
- Meets OSHA 1910.212(A)(5) Requirements
- 9 Ft, 120V Grounded Cord & GFCI Plug
- Scratch Resistant, Powder- Coated Finish
- Adjustable Height from 57" to 75"
- UL Certified for USA & Canada
- 1-Year Limited Warranty

## The King High Velocity Commercial Air Circulator

**King Commercial High Velocity Outdoor Rated Oscillating Air Circulators** are a powerful commercial-grade solution for cooling workshops, warehouses, factories, gyms and more. This oscillating fan motion distributes airflow in a 80 degree sweeping motion or disengage for manual desired hand positioning. The waterproof, totally enclosed motor is outdoor rated for wet locations and offers 3-speeds. Featuring 3 aerodynamically balanced aluminum blades for even, steady airflow and to provide maximum air and motor efficiency. The scratch resistant King green finish looks sharp and is easy to clean. Wall Mounted to direct the air flow where you need it most.

### Ordering Information

| MODEL NUMBER | UPC #093319 | DESCRIPTION   | CFM            | WT. (lbs.) |
|--------------|-------------|---|----------------|------------|
| WFO-24       | 33154       | 24" Outdoor Rated Oscillating Wall Mounted Air Circulator | 7500/6200/4900 | 67.2       |
| WFO-30       | 33155       | 30" Outdoor Rated Oscillating Wall Mounted Air Circulator | 8200/6800/5300 | 73.3       |

### Accessories

| MODEL                | UPC   | DESCRIPTION   | SHIP WEIGHT lbs |
|----------------------|-------|---|-----------------|
| PFO-MISTKIT          | 33153 | Add-On Accessory For Optional Misting Feature           | 0.5             |
| FO-COVER-24          | 55376 | 24" Water Resistant Fan Cover                           | 0.25            |
| FO-COVER-30          | 55377 | 30" Water Resistant Fan Cover                           | 0.25            |
| FAN-SPEED-CONTROLLER | 55378 | Fan Motor Variable Speed Control Plug-In, 120V 2.5A Max | 0.5             |



**FAN-SPEED-CONTROLLER**



**FO-COVERS**  
(Available in 24" & 30")

# High Velocity Outdoor Rated Air Circulator WFO Series

## WFO Series



Outdoor Rated  
for Wet Locations

Water Resistant  
Fan Cover  
(Available in 24" & 30")

Oscillating Fan Motion Distributive  
Airflow in a 80 Degree Sweep or  
Disengage for Manual Desired  
Hand Positioning

(3) Non-Corroding  
Aluminum Blades  
for Maximum Airflow

3-Speed Pull Chain  
Switch Controls Air  
Flow Output to  
Match Your Needs

Optional Misting  
Kit Available: Adds  
a Fine Mist of Cool  
Comfort to Hot  
Environments

Wall Mount Bracket

9 Ft Grounded Three  
Wire Conductor Cord  
& GFCI Plug, 120V -  
For Easy Portability  
& Safety

Optional  
PFO-Mistkit

