

High Velocity Drum Fans Belt Drive



Model Code:

DFC	-24	B
A	B	C

A: Series

B: Fan Diameter
(36", 42", 48")

C: B = Belt Drive Motor



- 2-speed switch Belt drive motor
- Incredibly quiet for its size & performance levels
- 4 aerodynamically balanced blades
- Convenient handles & Rugged wheels
- Meets OSHA 1910.212(A)(5) requirements
- 9 Ft, 120V grounded cord & plug
- Scratch resistant, powder- coated finish
- Built-In cord wrap
- Heavy duty 20 gauge steel drum
- Reinforced with tubular cross braces
- Standard color: King Green
- 1-year limited warranty

The King High Velocity Drum Fans - Belt Drive

King High Velocity Industrial Belt Drive Drum Fans were specifically designed for industrial applications where quality, performance, and durability are required. Rugged and reliable, they make less noise and use a lower power load, which gives the fan's motor a longer life. The 2-speed, belt drive fan has 4 aerodynamically balanced aluminum blades for even, steady airflow and to provide maximum airflow and motor efficiency. The scratch-resistant King green finish looks sharp and is easy to clean. Rugged flat-free wheels with metal hubs last for years and roll easily over uneven surfaces. Cord wrap for convenient storage. UL listed.

Ordering Information

MODEL NUMBER	UPC #093319	DESCRIPTION	CFM	WT. (lbs.)
DFC-42B	32711	Drum Fan, 42" Belt Drive, Fixed	15800	96.01
DFC-48B	32712	Drum Fan, 48" Belt Drive, Fixed	17800	118.5

Accessories


MODEL	UPC	DESCRIPTION	SHIP WEIGHT lbs
FAN-SPEED-CONTROLLER	55378	Fan Motor Variable Speed Control Plug-In, 120V 2.5A Max	.05



FAN-SPEED-CONTROLLER

High Velocity Drum Fans Belt Drive

Belt Drive

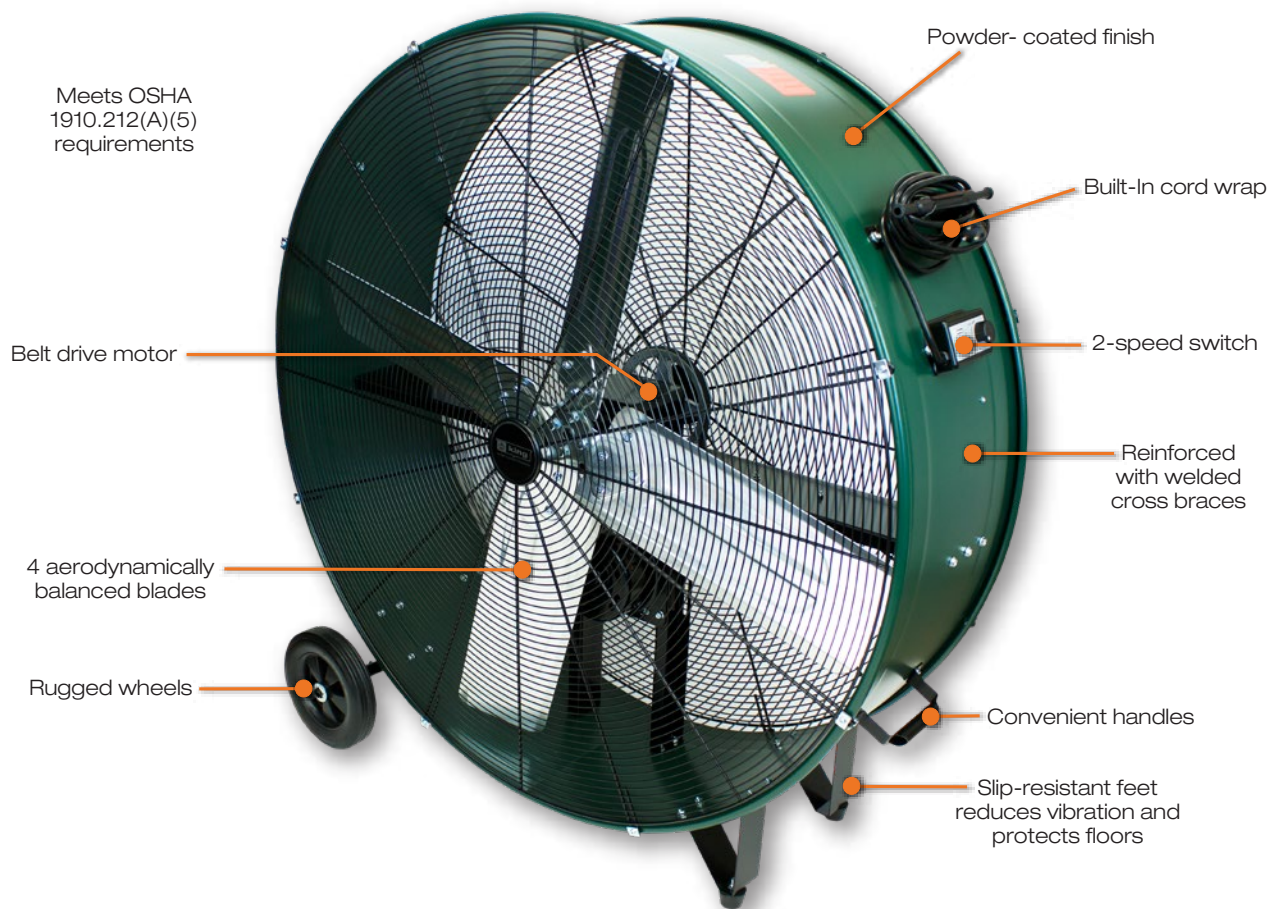

High Velocity Drum Fans Direct Drive



Model Code:

DFC -24 D -S
A B C D

A: Series

B: Fan Diameter
(36", 42", 48")

C: D = Direct Drive Motor

D: -S = Swivel Base (Optional)



- 2-speed switch Belt drive motor
- 3 aerodynamically balanced blades
- Convenient handles & Rugged wheels
- Meets OSHA 1910.212(A)(5) requirements
- 9 Ft, 120V grounded cord & plug
- Scratch resistant, powder- coated finish
- Built-In cord wrap
- Heavy duty 20 gauge steel drum
- Reinforced with tubular cross braces
- Standard color: King Green
- Optional swivel base available
- 1-year limited warranty

The King High Velocity Drum Fans - Direct Drive

King High Velocity Direct Drive Drum Fans are great for heavy duty air circulation in light duty commercial applications where an economical solution is needed. They are dependable, running on less power and require less maintenance compared to other motors. The 2-speed, direct drive fan has 3 aerodynamically balanced aluminum blades for even, steady airflow and to provide maximum airflow and motor efficiency. The scratch resistant King green finish looks sharp and is easy to clean. Rugged flat-free wheels with metal hubs last for years and roll easily over uneven surfaces. Cord wrap for convenient storage. UL listed.

Ordering Information

MODEL NUMBER	UPC #093319	DESCRIPTION	CFM	WT. (lbs.)
DFC-24D-S	32705	Drum Fan, 24" Direct Drive, Swivel	7300	39.04
DFC-30D-S	32707	Drum Fan, 30" Direct Drive, Swivel	8800	54.96
DFC-36D	32709	Drum Fan, 36" Direct Drive, Fixed	11630	65.74

Accessories


MODEL	UPC	DESCRIPTION	SHIP WEIGHT lbs
FAN-SPEED-CONTROLLER	55378	Fan Motor Variable Speed Control Plug-In, 120V 2.5A Max	0.5



FAN-SPEED-CONTROLLER

High Velocity Drum Fans Direct Drive

Direct Drive

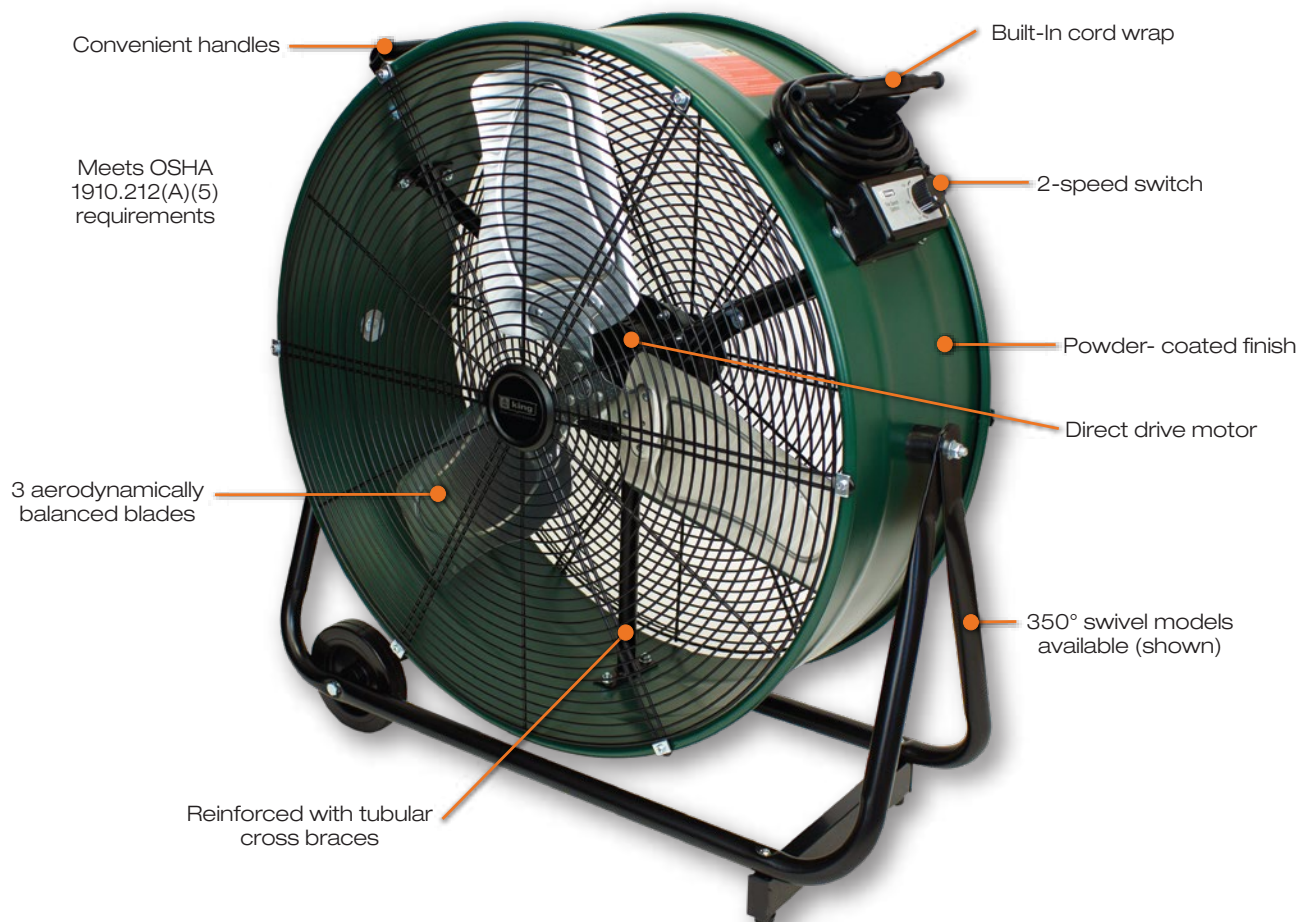

High Velocity Outdoor Rated Air Circulator PFO Series



Optional Misting Kit
(Shown)



Model Code:

PFO -24
A B

A: Series
B: Fan Diameter
-24 = 24"
-30 = 30"



- 24" & 30" Commercial High Velocity Oscillating Air Circulator
- Outdoor Rated with Pedestal Base
- Optional Misting Kit Available
- Optional Fan-Speed-Controller
- 3-Speed Pull Chain Switch
- Totally Enclosed, Outdoor Rated Motor
- 3 Aerodynamically Balanced Blades
- Heavy Duty Steel Fan Guards
- Meets OSHA 1910.212(A)(5) Requirements
- 9 Ft, 120V Grounded Cord & GFCI Plug
- Scratch Resistant, Powder- Coated Finish
- Adjustable Height from 57" to 75"
- UL Certified for USA & Canada
- 1-Year Limited Warranty

The King High Velocity Commercial Air Circulator

King Commercial High Velocity Outdoor Rated Oscillating Air Circulators are a powerful commercial-grade solution for cooling workshops, warehouses, factories, gyms and more. This oscillating fan motion distributes airflow in a 80 degree sweeping motion or from a fixed position. The waterproof, totally enclosed motor is outdoor rated for wet locations and offers 3-speeds. Featuring 3 aerodynamically balanced aluminum blades for even, steady airflow and to provide maximum air and motor efficiency. The scratch resistant King green finish looks sharp and is easy to clean. Height adjustable from 57" to 75" to direct the air flow where you need it most.

Ordering Information

MODEL NUMBER	UPC #093319	DESCRIPTION	CFM	WT. (lbs.)
PFO-24	33151	24" Outdoor Rated Oscillating Circulator With Pedestal Base	7500/6200/4900	67.2
PFO-30	33152	30" Outdoor Rated Oscillating Circulator With Pedestal Base	8200/6800/5300	73.3

Accessories

MODEL	UPC	DESCRIPTION	SHIP WEIGHT lbs
PFO-MISTKIT	33153	Add-On Accessory For Optional Misting Feature	0.5
FO-COVER-24	55376	24" Water Resistant Fan Cover	0.25
FO-COVER-30	55377	30" Water Resistant Fan Cover	0.25
FAN-SPEED-CONTROLLER	55378	Fan Motor Variable Speed Control Plug-In, 120V 2.5A Max	0.5



FAN-SPEED-CONTROLLER



FO-COVERS
(Available in 24" & 30")

High Velocity Outdoor Rated Air Circulator PFO Series

PFO Series



Outdoor Rated
for Wet Locations

9 Ft Grounded Three
Wire Conductor Cord
& GFCI Plug, 120V -
For Easy Portability
& Safety

Optional Misting
Kit Available: Adds
a Fine Mist of Cool
Comfort to Hot
Environments

Scratch Resistant,
Powder-Coated
Finish for Durability

Oscillating Fan Motion
Distributive Airflow in a
80 Degree Sweep or
Fixed Position

(3) Non-Corroding
Aluminum Blades
for Maximum Airflow

3-Speed Pull Chain
Switch Controls Air
Flow Output to
Match Your Needs

Optional
PFO-Mistkit

Water Resistant
Fan Cover
(Available in 24" & 30")



High Velocity Outdoor Rated Air Circulator WFO Series



Optional Misting Kit
(Shown)



Model Code:

WFO -24
A B

A: Series
B: Fan Diameter
-24 = 24"
-30 = 30"



- 24" & 30" Commercial High Velocity Oscillating Air Circulator
- Outdoor Rated with Wall Mount
- Wall mounted to direct airflow
- 80 degree oscillating motion
- Optional Misting Kit Available
- Optional Fan-Speed-Controller
- 3-Speed Pull Chain Switch
- Totally Enclosed, Outdoor Rated Motor
- 3 Aerodynamically Balanced Blades
- Heavy Duty Steel Fan Guards
- Meets OSHA 1910.212(A)(5) Requirements
- 9 Ft, 120V Grounded Cord & GFCI Plug
- Scratch Resistant, Powder- Coated Finish
- Adjustable Height from 57" to 75"
- UL Certified for USA & Canada
- 1-Year Limited Warranty

The King High Velocity Commercial Air Circulator

King Commercial High Velocity Outdoor Rated Oscillating Air Circulators are a powerful commercial-grade solution for cooling workshops, warehouses, factories, gyms and more. This oscillating fan motion distributes airflow in a 80 degree sweeping motion or disengage for manual desired hand positioning. The waterproof, totally enclosed motor is outdoor rated for wet locations and offers 3-speeds. Featuring 3 aerodynamically balanced aluminum blades for even, steady airflow and to provide maximum air and motor efficiency. The scratch resistant King green finish looks sharp and is easy to clean. Wall Mounted to direct the air flow where you need it most.

Ordering Information

MODEL NUMBER	UPC #093319	DESCRIPTION	CFM	WT. (lbs.)
WFO-24	33154	24" Outdoor Rated Oscillating Wall Mounted Air Circulator	7500/6200/4900	67.2
WFO-30	33155	30" Outdoor Rated Oscillating Wall Mounted Air Circulator	8200/6800/5300	73.3

Accessories

MODEL	UPC	DESCRIPTION	SHIP WEIGHT lbs
PFO-MISTKIT	33153	Add-On Accessory For Optional Misting Feature	0.5
FO-COVER-24	55376	24" Water Resistant Fan Cover	0.25
FO-COVER-30	55377	30" Water Resistant Fan Cover	0.25
FAN-SPEED-CONTROLLER	55378	Fan Motor Variable Speed Control Plug-In, 120V 2.5A Max	0.5



FAN-SPEED-CONTROLLER



FO-COVERS
(Available in 24" & 30")

High Velocity Outdoor Rated Air Circulator WFO Series

WFO Series



Outdoor Rated
for Wet Locations

Water Resistant
Fan Cover
(Available in 24" & 30")

Oscillating Fan Motion Distributive
Airflow in a 80 Degree Sweep or
Disengage for Manual Desired
Hand Positioning

(3) Non-Corroding
Aluminum Blades
for Maximum Airflow

3-Speed Pull Chain
Switch Controls Air
Flow Output to
Match Your Needs

Optional Misting
Kit Available: Adds
a Fine Mist of Cool
Comfort to Hot
Environments

9 Ft Grounded Three
Wire Conductor Cord
& GFCI Plug, 120V -
For Easy Portability
& Safety

Wall Mount Bracket

Optional
PFO-Mistkit

