



SUBMITTAL SHEET

Job Name: _____	Submitted By: _____	Date: _____
Location: _____	_____	_____
Architect: _____	_____	_____
Engineer: _____	Approved By: _____	Date: _____
Contractor: _____	_____	_____
Submitted By: _____	_____	_____
King Contact: _____	_____	_____
Quotes@king-electric.com		
Date: _____		

Tag	Qty	Item Number	Watts	Volts	PH	Amps	Weight
_____	_____	_____	_____	_____	_____	_____	_____
_____	_____	_____	_____	_____	_____	_____	_____
_____	_____	_____	_____	_____	_____	_____	_____
_____	_____	_____	_____	_____	_____	_____	_____
_____	_____	_____	_____	_____	_____	_____	_____
_____	_____	_____	_____	_____	_____	_____	_____
_____	_____	_____	_____	_____	_____	_____	_____
_____	_____	_____	_____	_____	_____	_____	_____
_____	_____	_____	_____	_____	_____	_____	_____
_____	_____	_____	_____	_____	_____	_____	_____
_____	_____	_____	_____	_____	_____	_____	_____
_____	_____	_____	_____	_____	_____	_____	_____
_____	_____	_____	_____	_____	_____	_____	_____
_____	_____	_____	_____	_____	_____	_____	_____

Accessories

Tag	Qty	Item Number
_____	_____	_____
_____	_____	_____
_____	_____	_____

Hydronic Kickspace Heater HT Series



Model Code:

HT	4	12	2/3	AS	GW
A	B	C	D	E	F

A: Series

B: Number of Copper Tubes in Coil

C: 12 - 120V

D: BTU Heat Output

E: Aqua Stat

F: Grille White, Almond or Satin Black color



- Tangential Blowers
- Fast Coil Heating
- Quiet Operation
- 1/2" Trade size copper tubes
- Flow-through design
- 4 or 8 Aluminum fins per inch
- Easy motor removal for maintenance
- Permanently lubricated motor
- Powder-coated white, almond & satin black grill
- Hi / Off / Lo fan switch
- Aqua Stat included
- Use HW series thermostats
- 1 Year Warranty

The HT Series Hydronic Kickspace Heater

King's HT Series Kickspace hydronic heater uses the energy from a building's existing hot water source to offer efficient, whisper quiet operation and the ability to reduce utility bills with individual room control. By installing hydronic heaters in every room, you can easily heat only the areas in use and conserve energy. Uniquely designed to add heat to areas of the home previously thought not possible. With a compact, space-saving design the HT heater can be inconspicuously installed in the kick-space area at the base of kitchen and bathroom cabinets, under window sills or even in stair risers, providing warmth and comfort to formerly troublesome areas. Provides 1700 to 9950 BTU heat output.

Ordering Information

	MODEL	FINS PER INCH	FT. OF WATER PRESSURE DROP @ 2 GPM	AMPS	RPM	CFM	BTUH@2GPM	120°	140°*	160°*	180°	200° MAX.
120V	HT412 2/3	8	0.36	0.54	2000	83	High Speed	1,700	2,500	3,400	4,600	5,200
	HT412 2/3	8	0.36	0.51	1800	76	Low Speed	1,600	2,400	3,200	4,000	5,000
	HT612 4/5	8	0.54	0.54	2000	83	High Speed	2,800	4,000	5,100	6,900	8,200
	HT612 4/5	8	0.54	0.51	1800	76	Low Speed	2,400	3,250	4,350	6,000	6,500
	HT812 5/7	8	0.72	0.54	2000	83	High Speed	3,675	5,000	6,600	7,500	9,950
	HT812 5/7	8	0.72	0.51	1800	76	Low Speed	3,200	4,300	5,400	7,000	8,400

*Aqua Stat not required when using a King HW series hydronic thermostat with fan start-up delay. In-built Aqua Stat (AS) is available, consult factory for price and availability. Coils are made of copper alloy 122 manufactured to ATSM B-75 specifications. Brazing alloy is AWS-BCUP2 for use with potable water systems.

Electrical circuit size: 15 amp maximum.

BTU ratings based on 68° entering air. To calculate 1 GPM, multiply by 0.95. To calculate 4 GPM, multiply by 1.05.

Grille colors available in White (-GW) or Satin Black (-SB) or Almond (-GA). Add suffix to end of model number.


	MODEL	CONTROLS		WHITE	GRILLES ALMOND	SATIN BLACK	WATER TEMPERATURE		VOLTS	AMPS
		AQUA STAT	FAN SWITCH				140°F/60°C	160°F/72°C		
120V	HT412 2/3	AS	FS	GW	GA	SB	2500	3400	120	0.36
	HT612 4/5	AS	FS	GW	GA	SB	4000	5100	120	0.36
	HT812 5/7	AS	FS	GW	GA	SB	5000	6600	120	0.54

Replacement Accessories

ADD SUFFIX:	UPC	DESCRIPTION	WT. (lbs.)
HT GRILL	21050	HT Accessory Grill 20" White	0.8
HT GRILL N/S	20861	HT Accessory Grill 20" White No Switch	0.8
HT GRILL-SB	21141	HT Accessory Grill 20" Satin Black	0.8
HT GRILL-SB N/S	20862	HT Accessory Grill 20" Satin Black No Switch	0.8

Hydronic Kickspace Heater HT Series

Dimensional Data

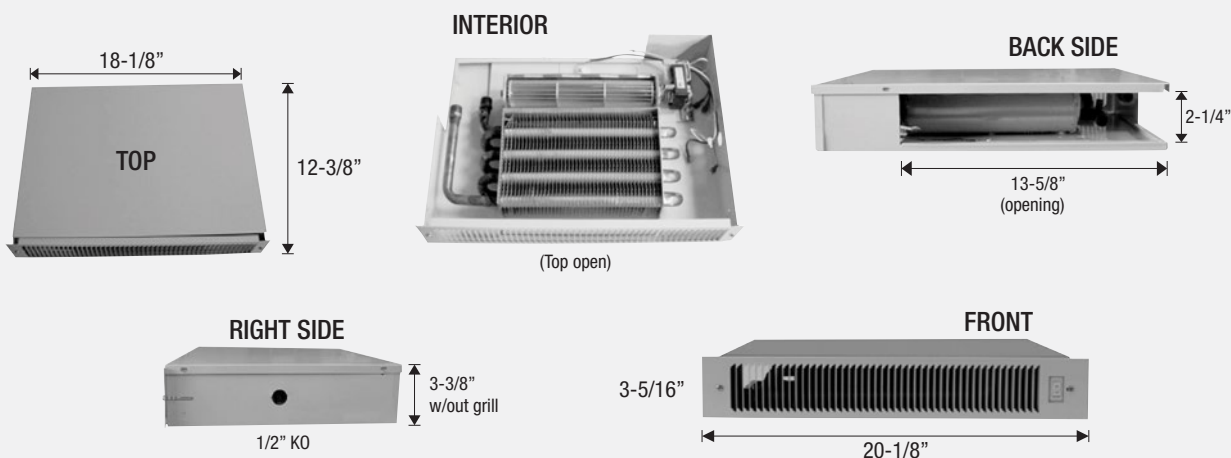

Aquastat




The optional **aqua stat** component makes sure the water temperature is over 115° before the fan is turned on.

3-Position Switch



The optional fan speed switch allows fan speeds of high, low and a center "off" position.

Terminal Board

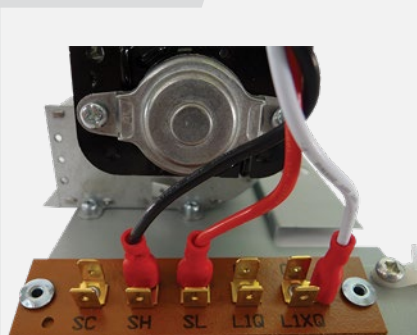

All models include a pre-wired, clear, easy-to-read terminal board with wiring diagram.

Engineering Specifications

Contractor shall supply and install H Series hydronic fan heaters manufactured by King Electrical Mfg. Co., Seattle, Washington.

Motor: 2 speed shaded pole impedance protected. Permanently lubricated. Bronze bearings.

Blower: Tangential blower to provide 83 CFM or 76 CFM of air. Quiet operation of less than 53 dB A weighted scale at high speed. Easily removed for service. Bronze, not plastic, bearings.

Coils: 1/2" trade size Copper tubes with Aluminum fins of no more than 4 fins per inch for free flow of air and maximum circulation of air and water. Tested at 300 PSI for leaks. Bleed valve to purge air. Copper tube used in coils is Alloy 122 made to ASTM B-75 specifications.

Grill: 20 gauge mild Steel, louvered with Nickel-plated grill screws. Powder-coated in white.

Wall Can: 20 gauge mild Steel, electro-galvanized to resist corrosion.

1/2" knockout in bottom of can and QuickSet™ bend out mounting tabs for fast installation.

Aqua Stat: ensures the water temperature is over 115°F before the fan turns ON

Fan Switch: 3 position fan switch High / Off / Low. Rated at 10 Amps with wire leads and insulated ¼" quick connects.

Terminal Board: All electrical connections will terminate at a phenolic terminal board with ¼" male brass blades for easy wiring.

Water Connections: 5/8" bare Copper tubes de-burred. Tested at 300 PSI for leaks. Clean out tubes for water connection.

Approvals: cETLus. . All King heaters are tested to UL 1995 Standards. Approved for USA and Canada. CSA/C22.2.