



# SUBMITTAL SHEET

|                                                                        |       |               |       |       |       |
|------------------------------------------------------------------------|-------|---------------|-------|-------|-------|
| Job Name:                                                              | _____ | Submitted By: | _____ | Date: | _____ |
| Location:                                                              | _____ |               | _____ |       | _____ |
| Architect:                                                             | _____ |               | _____ |       | _____ |
| Engineer:                                                              | _____ | Approved By:  | _____ | Date: | _____ |
| Contractor:                                                            | _____ |               | _____ |       | _____ |
| Submitted By:                                                          | _____ |               | _____ |       | _____ |
| King Contact:                                                          | _____ |               | _____ |       | _____ |
| <a href="mailto:Quotes@king-electric.com">Quotes@king-electric.com</a> |       |               |       |       |       |
| Date:                                                                  | _____ |               |       |       |       |

| Tag   | Qty   | Item Number | Watts | Volts | PH    | Amps  | Weight |
|-------|-------|-------------|-------|-------|-------|-------|--------|
| _____ | _____ | _____       | _____ | _____ | _____ | _____ | _____  |
| _____ | _____ | _____       | _____ | _____ | _____ | _____ | _____  |
| _____ | _____ | _____       | _____ | _____ | _____ | _____ | _____  |
| _____ | _____ | _____       | _____ | _____ | _____ | _____ | _____  |
| _____ | _____ | _____       | _____ | _____ | _____ | _____ | _____  |
| _____ | _____ | _____       | _____ | _____ | _____ | _____ | _____  |
| _____ | _____ | _____       | _____ | _____ | _____ | _____ | _____  |
| _____ | _____ | _____       | _____ | _____ | _____ | _____ | _____  |
| _____ | _____ | _____       | _____ | _____ | _____ | _____ | _____  |
| _____ | _____ | _____       | _____ | _____ | _____ | _____ | _____  |
| _____ | _____ | _____       | _____ | _____ | _____ | _____ | _____  |
| _____ | _____ | _____       | _____ | _____ | _____ | _____ | _____  |
| _____ | _____ | _____       | _____ | _____ | _____ | _____ | _____  |
| _____ | _____ | _____       | _____ | _____ | _____ | _____ | _____  |

## Accessories

| Tag   | Qty   | Item Number |
|-------|-------|-------------|
| _____ | _____ | _____       |
| _____ | _____ | _____       |
| _____ | _____ | _____       |

# Hydronic Kickspace Heater HT Series



## Model Code:

H 12 03 -FS -AS -BW  
A B C D E F

A: Series

B: Voltage 12 = 120 Volt

C: 03 = 3400Btu heat output  
@ 160°F / High Speed

D: Fan Switch (Standard)

E: Aqua Stat (Optional)

F: Grill Color: -BW = Bright White  
or -SB = Satin Black



With U.S. & Global Materials

- Tangential Blowers
- Fast Coil Heating
- Quiet Operation
- 1/2" Trade size copper tubes
- Flow-through design
- 4 or 8 Aluminum fins per inch
- Easy motor removal for maintenance
- Permanently lubricated motor
- Powder-coated bright white & satin black grill
- Hi / Off / Lo fan switch
- Optional Aqua Stat Available
- Use HW series thermostats
- 1 Year Warranty

## The HT Series Hydronic Kickspace Heater

King's HT Series Kicks-pace hydronic heater uses the energy from a building's existing hot water source to offer efficient, whisper quiet operation and the ability to reduce utility bills with individual room control. By installing hydronic heaters in every room, you can easily heat only the areas in use and conserve energy. Uniquely designed to add heat to areas of the home previously thought not possible. With a compact, space-saving design the HT heater can be inconspicuously installed in the kick-space area at the base of kitchen and bathroom cabinets, under window sills or even in stair risers, providing warmth and comfort to formerly troublesome areas. Provides 1700 to 9950 BTU heat output.

## Ordering Information \*Add suffix -BW for Bright White Grill, -SB for Satin Black

| 120V | MODEL     | PER | FINS<br>PRESSURE DROP<br>INCH | FT. OF WATER<br>BTUH@2GPM<br>@ 2 GPM | AMPS | RPM   | CFM | 120°  | 140°* | 160°* | 180°  | 200°<br>MAX. |
|------|-----------|-----|-------------------------------|--------------------------------------|------|-------|-----|-------|-------|-------|-------|--------------|
|      | HT1203-FS | 8   | 0.36                          | HIGH SPEED                           | 0.54 | 2,000 | 83  | 1,700 | 2,500 | 3,400 | 4,600 | 5,200        |
|      |           |     |                               | LOW SPEED                            | 0.51 | 1,800 | 76  | 1,600 | 2,400 | 3,200 | 4,000 | 5,000        |
|      | HT1205-FS | 8   | 0.54                          | HIGH SPEED                           | 0.54 | 2,000 | 83  | 2,800 | 4,000 | 5,100 | 6,900 | 8,200        |
|      |           |     |                               | LOW SPEED                            | 0.51 | 1,800 | 76  | 2,400 | 3,250 | 4,350 | 6,000 | 6,500        |
|      | HT1207-FS | 8   | 0.72                          | HIGH SPEED                           | 0.54 | 2,000 | 83  | 3,675 | 5,000 | 6,600 | 7,500 | 9,950        |
|      |           |     |                               | LOW SPEED                            | 0.51 | 1,800 | 76  | 3,200 | 4,300 | 5,400 | 7,000 | 8,400        |

\*Aqua Stat not required when using a King HW series hydronic thermostat with fan start-up delay. In-built Aqua Stat (AS) is available, consult factory for price and availability. Coils are made of copper alloy 122 manufactured to ATSM B-75 specifications. Brazing alloy is AWS-BCUP2 for use with potable water systems. Electrical circuit size: 15 amp maximum. BTU ratings based on 68° entering air. To calculate 1 GPM, multiply by 0.95. To calculate 4 GPM, multiply by 1.05. Grille colors available in Bright White (-BW) or Satin Black (-SB)

## Factory Installed Options


| ADD SUFFIX | DESCRIPTION |
|------------|-------------|
| -AS        | Aqua Stat   |

## Replacement Accessories

| ADD SUFFIX: | UPC   | DESCRIPTION                                                                          | WT. (lbs.) |
|-------------|-------|--------------------------------------------------------------------------------------|------------|
| HTG-BW      | 21050 | HT Accessory Grill 20" Bright White - Switch Provision (Switch Purchased Separately) | 0.8        |
| HTG-SB      | 21141 | HT Accessory Grill 20" Satin Black - Switch Provision (Switch Purchased Separately)  | 0.8        |

# Hydronic Kickspace Heater HT Series

## Dimensional Data

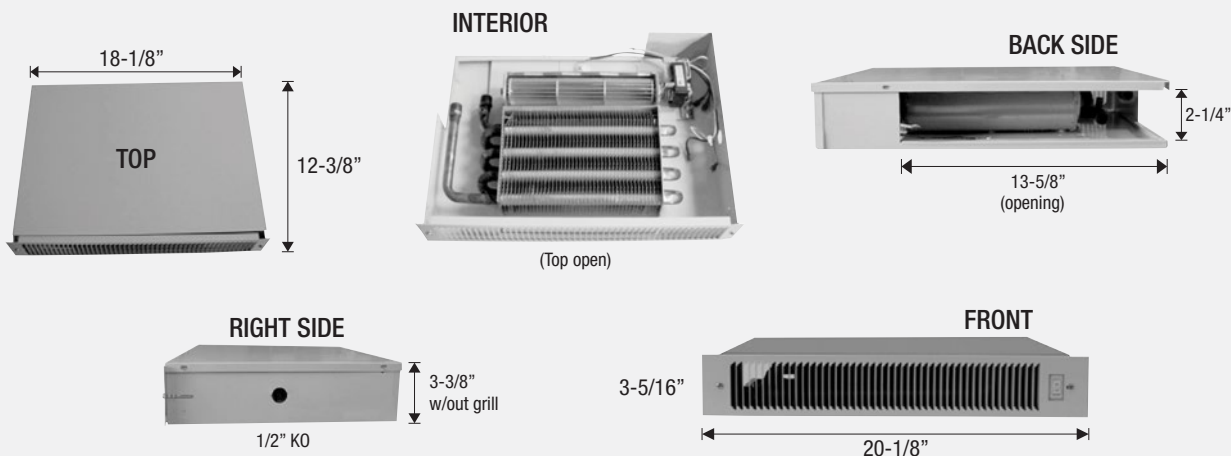

## Aquastat




The optional **aqua stat** component makes sure the water temperature is over 115° before the fan is turned on.

## 3-Position Switch



The optional fan speed switch allows fan speeds of high, low and a center "off" position.

## Terminal Board

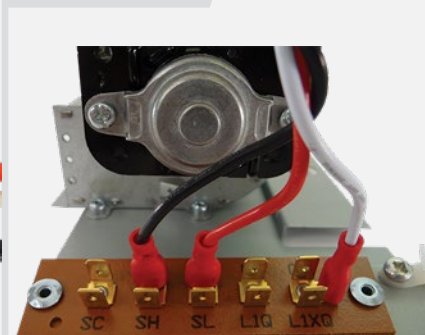

All models include a pre-wired, clear, easy-to-read terminal board with wiring diagram.

## Engineering Specifications

Contractor shall supply and install HT Series hydronic fan heaters manufactured by King Electrical Mfg. Co., Seattle, Washington.

**Motor:** 2 speed shaded pole impedance protected. Permanently lubricated. Bronze bearings.

**Blower:** Tangential blower to provide 83 CFM or 76 CFM of air. Quiet operation of less than 53 dB A weighted scale at high speed. Easily removed for service. Bronze, not plastic, bearings.

**Coils:** 1/2" trade size Copper tubes with Aluminum fins of no more than 4 fins per inch for free flow of air and maximum circulation of air and water. Tested at 300 PSI for leaks. Bleed valve to purge air. Copper tube used in coils is Alloy 122 made to ASTM B-75 specifications.

**Grill:** 20 gauge mild Steel, louvered with Nickel-plated grill screws. Powder-coated in bright white & satin black.

**Wall Can:** 20 gauge mild Steel, electro-galvanized to resist corrosion. 1/2" knockout in bottom of can and QuickSet™ bend out mounting tabs for fast installation.

**Aqua Stat Optional:** ensures the water temperature is over 115°F before the fan turns ON

**Fan Switch:** 3 position fan switch High / Off / Low. Rated at 10 Amps with wire leads and insulated 1/4" quick connects.

**Terminal Board:** All electrical connections will terminate at a phenolic terminal board with 1/4" male brass blades for easy wiring.

**Water Connections:** 5/8" bare Copper tubes de-burred. Tested at 300 PSI for leaks. Clean out tubes for water connection.

**Approvals:** cETLus. . All King heaters are tested to UL 1995 Standards. Approved for USA and Canada. CSA/C22.2.