



# SUBMITTAL SHEET

Job Name: _____	Submitted By: _____	Date: _____
Location: _____	_____	_____
Architect: _____	_____	_____
Engineer: _____	Approved By: _____	Date: _____
Contractor: _____	_____	_____
Submitted By: _____	_____	_____
King Contact: _____	_____	_____
<a href="mailto:Quotes@king-electric.com">Quotes@king-electric.com</a>		
Date: _____		

Tag	Qty	Item Number	Watts	Volts	PH	Amps	Weight
_____	_____	_____	_____	_____	_____	_____	_____
_____	_____	_____	_____	_____	_____	_____	_____
_____	_____	_____	_____	_____	_____	_____	_____
_____	_____	_____	_____	_____	_____	_____	_____
_____	_____	_____	_____	_____	_____	_____	_____
_____	_____	_____	_____	_____	_____	_____	_____
_____	_____	_____	_____	_____	_____	_____	_____
_____	_____	_____	_____	_____	_____	_____	_____
_____	_____	_____	_____	_____	_____	_____	_____
_____	_____	_____	_____	_____	_____	_____	_____
_____	_____	_____	_____	_____	_____	_____	_____
_____	_____	_____	_____	_____	_____	_____	_____
_____	_____	_____	_____	_____	_____	_____	_____
_____	_____	_____	_____	_____	_____	_____	_____

## Accessories

Tag	Qty	Item Number
_____	_____	_____
_____	_____	_____
_____	_____	_____

# High Velocity Outdoor Rated Air Circulator PFO Series



Optional Misting Kit  
(Shown)



## Model Code:

PFO -24  
A B

A: Series  
B: Fan Diameter  
-24 = 24"  
-30 = 30"



- 24" & 30" Commercial High Velocity Oscillating Air Circulator
- Outdoor Rated with Pedestal Base
- Optional Misting Kit Available
- Optional Fan-Speed-Controller
- 3-Speed Pull Chain Switch
- Totally Enclosed, Outdoor Rated Motor
- 3 Aerodynamically Balanced Blades
- Heavy Duty Steel Fan Guards
- Meets OSHA 1910.212(A)(5) Requirements
- 9 Ft, 120V Grounded Cord & GFCI Plug
- Scratch Resistant, Powder- Coated Finish
- Adjustable Height from 57" to 75"
- UL Certified for USA & Canada
- 1-Year Limited Warranty

## The King High Velocity Commercial Air Circulator

**King Commercial High Velocity Outdoor Rated Oscillating Air Circulators** are a powerful commercial-grade solution for cooling workshops, warehouses, factories, gyms and more. This oscillating fan motion distributes airflow in a 80 degree sweeping motion or from a fixed position. The waterproof, totally enclosed motor is outdoor rated for wet locations and offers 3-speeds. Featuring 3 aerodynamically balanced aluminum blades for even, steady airflow and to provide maximum air and motor efficiency. The scratch resistant King green finish looks sharp and is easy to clean. Height adjustable from 57" to 75" to direct the air flow where you need it most.

### Ordering Information

MODEL NUMBER	UPC #093319	DESCRIPTION	CFM	WT. (lbs.)
PFO-24	33151	24" Outdoor Rated Oscillating Circulator With Pedestal Base	7500/6200/4900	50.0
PFO-30	33152	30" Outdoor Rated Oscillating Circulator With Pedestal Base	8200/6800/5300	56.0

### Accessories

MODEL	UPC	DESCRIPTION	SHIP WEIGHT lbs
PFO-MISTKIT	33153	Add-On Accessory For Optional Misting Feature	0.5
FO-COVER-24	55376	24" Water Resistant Fan Cover	0.25
FO-COVER-30	55377	30" Water Resistant Fan Cover	0.25
FAN-SPEED-CONTROLLER	55378	Fan Motor Variable Speed Control Plug-In, 120V 3A Max	0.5



FAN-SPEED-CONTROLLER



FO-COVERS  
(Available in 24" & 30")

# High Velocity Outdoor Rated Air Circulator PFO Series


## PFO Series



Outdoor Rated  
for Wet Locations

9 Ft Grounded Three  
Wire Conductor Cord  
& GFCI Plug, 120V -  
For Easy Portability  
& Safety

Optional Misting  
Kit Available: Adds  
a Fine Mist of Cool  
Comfort to Hot  
Environments

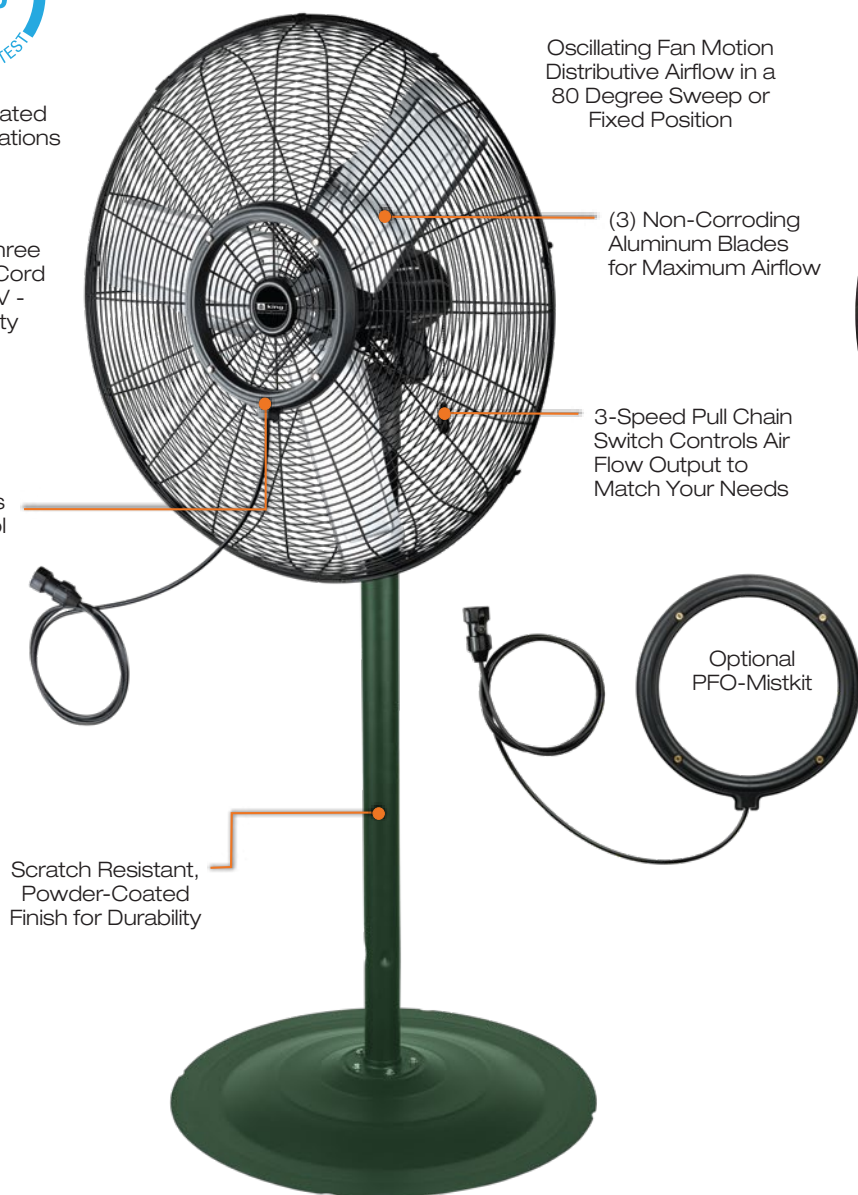

Oscillating Fan Motion  
Distributive Airflow in a  
80 Degree Sweep or  
Fixed Position

(3) Non-Corroding  
Aluminum Blades  
for Maximum Airflow

3-Speed Pull Chain  
Switch Controls Air  
Flow Output to  
Match Your Needs

Scratch Resistant,  
Powder-Coated  
Finish for Durability

Water Resistant  
Fan Cover  
(Available in 24" & 30")



Optional  
PFO-Mistkit