

CWR IceFree™ Controller

Residential Roof and Gutter De-Icing Control



Use with CWR Cable

The CWR IceFree™ Controller is designed specifically for use with King’s CWR constant wattage roof and gutter De-Icing cable. Take the hassle out of managing residential roof de-icing with automatic control.


Designed to sense both temperature and the presence of run-off water, ensuring the heating cable only operates when necessary to prevent ice dams and frozen drains.

Both conditions must be met or the system does not run, saving on your energy bill and eliminating waste.

The CWR IceFree™ Controller is rated at 10 amps at 120V, requiring one unit per cable. 1200W Max.

UPC	MODEL	DESCRIPTION
48710	CWR-120	CWR IceFree Controller with 6ft. Cord and Grounded Plug

INSTALLATION

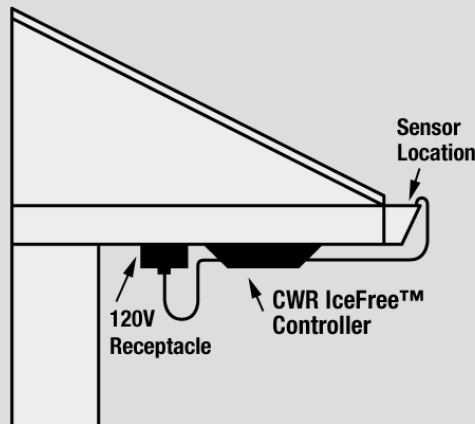

SPECIFICATIONS	
Construction	ABS
Rated Voltage	120 Volt
Max Wattage	1200 Watt
Application	Roof and Gutter De-Icing Control
Color	White
Includes	Control Unit Sensor Shingle Clips
Sensor Type	Electronic
Enclosure	Weather resistant