




KING ELECTRICAL MFG. CO.
SEATTLE, WA 98108

PT-1


IN-BUILT THERMOSTAT KIT FOR
KING MODEL **PAW** ELECTRIC
WALL HEATER - SINGLE POLE

WARNOCK HERSEY
WH CERTIFIED TO
CSA (22.2
NO. 46

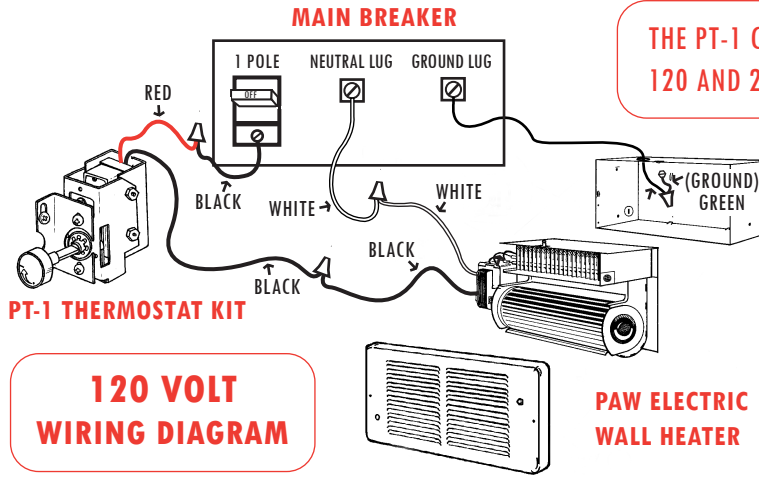

120 VOLT WIRING DIAGRAM

THE PT-1 CAN BE USED WITH
120 AND 240 VOLT HEATERS

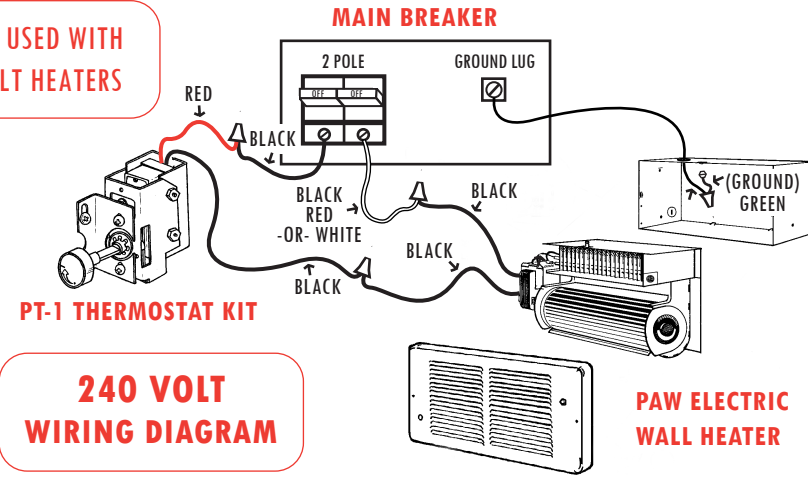

240 VOLT WIRING DIAGRAM


DANGER:

RISK OF SEVERE ELECTRICAL
SHOCK. DISCONNECT POWER
FROM MAIN BREAKER PANEL
FIRST BEFORE INSTALLATION.

FOR USE WITH:
120, 208, 240 VAC / 22 AMP
277 VAC / 18 AMP

TEMPERATURE RANGE: 40° - 90°F


PAW SERIES HEATER WITH PT-1 INSTALLATION

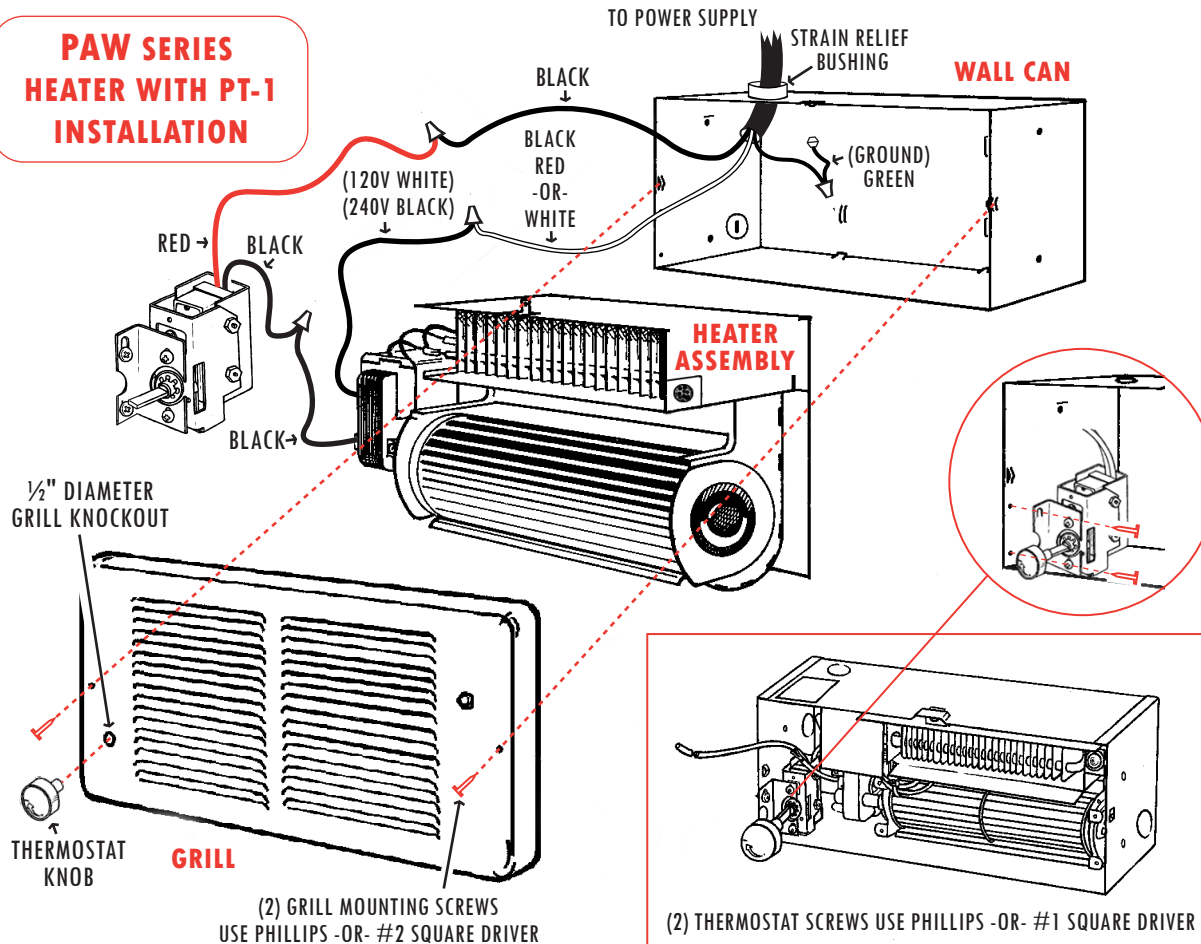

INSTRUCTIONS

1. MOUNT THERMOSTAT WITH 2 SCREWS PROVIDED.
2. COMPLETE WIRING AS SHOWN FOR THE PT-1.
3. INSTALL HEATER ASSEMBLY INTO WALL CAN.
4. REMOVE 1/2" GRILL KNOCKOUT FOR THERMOSTAT SHAFT.
5. MOUNT GRILL WITH 2 SCREWS.
6. PLACE PLASTIC KNOB ON THERMOSTAT SHAFT BY PUSHING KNOB THROUGH GRILL OPENING.

TOOLS:



PHILLIPS #1 SQUARE #2 SQUARE



ACCESSORY FOR THE
PAW SERIES HEATER

PT-1

