





# PWH Portable Fan Heater

**Dimensions:** 13½"W x 10"H x 4"D  
 Add 1" additional all sides for bracket  
**Weight:** 10lbs.

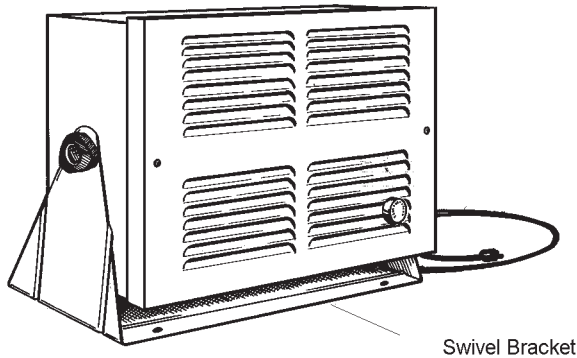

Swivel Bracket

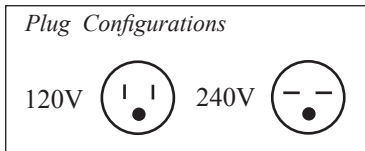

This heater includes a manual reset thermal protector with a self-hold feature. If the heater shuts off with the on position and the room temperature is below the highest thermostat setting immediately disconnect the power to the heater at the circuit breaker and inspect for any objects on or adjacent to the heater that may cause high temperatures. After inspecting the heater, keep the power off to the heater for 10 minutes to reset the thermal protector. If the heater thermal protector shuts the heater off again, immediately turn the heater off at the circuit breaker and inspect the heater for possible fan motor failure or dirt and lint on the heating element. Repeat starting procedure.

**Motor:** Thermally protected and permanently lubricated for trouble-free operation.

**Fan:** Tangential (squirrel cage) blower provides whisper quiet operation. 95 CFM.

**Element:** Convenient dual wattage element allows field adjustment to half wattage. Made from Ni-Chrome alloy open-coil wire wrapped around a mica insulator.

**Enclosure:** 20 gauge cabinet finished in a gloss white, powder-coated paint.

**Thermostat:** 1-Pole built-in thermostat with a temperature range of 45-80°F operating range.

**Cord:** 105°C 15 Amp 6' cord and plug. (see configurations below)

Model Number	UPC Vendor #783940	Volts	Watts	BTUH	Amps
PWH1210	16121	120	1000	3143	8.3
PWH1215	16120		1500	5120	12.5
PWH2410	16123	240	1000	3413	4.5
PWH2420	16122		2000	8192	10